

An Immersion Model for Software Engineering Projects

Neville Churcher and Andy Cockburn

Department of Computer Science

University of Canterbury

Christchurch, New Zealand

neville, andy@cosc.canterbury.ac.nz

May 18, 1998

Abstract

Software development projects are an essential component of software engineering courses. They provide the opportunity for students to apply theoretical material and to gain valuable experience in an environment typical of the workplace. These benefits, however, are difficult to realise. We discuss strategies for managing final-year software engineering projects in order to optimise the balance between pedagogy, course administration, and time constraints. In particular, we advocate an “immersion” model for software engineering projects. The immersion model emphasises the commercial realities of software development including activities such as reverse-engineering of existing systems, extensive code re-use, team work, user-interface development, interviews with customers, meetings with management, and oral presentations. Our experiences with the immersion model have been extremely encouraging with significant improvements in the quality of student projects.

1 Introduction

Teaching text-book theory of software engineering and user interface design, though valuable, provides students with a shallow understanding of the underlying issues.

We believe it is important for students to experience at first hand the application of theory to a ‘real world’ software system. Experience gained in group dynamics, teamwork, project management, presentation and technical writing provides students with skills that are valuable in the job market and in further study. The opportunities for imparting such experience within

the confines of an undergraduate course are limited [?, ?].

The third year software engineering course we teach in the Department of Computer Science at the University of Canterbury is typical in that it has, as a major component, a software development project. In 1995 we substantially modified both the project structure and our management procedures. Successful results were achieved in terms of the quality of the work produced, the range of skills learned, and the administrative burden of management and assessment.

Three major factors motivated our reassessment of the software engineering project. First, we were concerned that standard assignment submissions, accepted as normal in most academic courses, do not encourage students to carry out iterative improvement of their work based on feedback from the lecturers. Second, we were dissatisfied by the amount of staff time spent on activities that provided little academic worth to the students. Marking the submissions associated with large team projects is a substantial burden on the academic staff. If students do not revisit the marked work there is little academic value in the staff’s work. Third, the course time constraints place pressure on the scope of the software project. To reinforce the theoretical course content a software development project has to be sufficiently large and complex to require the management (and other) strategies described in the lectures, yet the time constraints limit the depth of student involvement. These three factors, if allowed, can form a vicious circle that results in frenetic work by students and lecturers, but without commensurate academic gains.

In this paper we discuss an “immersion model” for software engineering projects in which the academic staff play the role of project managers, and fellow students are used as potential customers. The aim is to create many of the commercial realities of software engineering projects within the constraints of an academic environment. Most formal assessment in the project is replaced by regular (approximately fortnightly) meetings with management. We outline some of our educational strategies and experiences, describe our current approach and compare it with some of the alternatives we have explored.

The paper is structured as follows. The next section outlines our current approach to coordinating the project, and briefly describes the 1995 project tasks. Section ?? summarises our primary learning objectives and identifies some of the advantages and difficulties of running a project in this manner. Our experiences with two previous models of project course structure are compared in section ?. Conclusions are presented in section ?.

2 The Immersion Model

This section describes the structure and management of our current project model which aims to immerse students in a realistic software development scenario. The 1995 project is briefly reviewed to provide an example of the model’s application. The educational (and other) rationale behind our use of the immersion model is presented in the section ?.

2.1 Structure and Management of the Project

Approximately forty students work in self-selected small groups (normally three per team) throughout the year to produce a functioning and documented piece of software. The project consists of four overlapping tasks, as follows:

1. Analyse and document an existing software system. The focus is on “reverse-engineering” the design of the system.
2. Modify and extend the functionality of the system. Students are required to make design decisions, re-use software components, and implement extensions.

3. Design an improved user interface for the system. This stage focuses on design rationale and rapid prototyping.
4. Implement the interface. The teams package the entire system and its documentation for release on the Internet.

The students are informed of this four-stage outline at the start of the year, but the detailed specifications of each stage are revealed individually throughout the year.

There is a single formal submission at the end of the year: the delivery of the complete extended software, interface, and companion documentation. On-going feedback, motivation, and direction is given to teams at approximately fortnightly meetings at which the current course lecturer plays the rôle of project manager.

At each meeting the team presents a progress report and discusses progress made, problems encountered, alternative solutions, design rationale, and so on. Groups are responsible for developing their own formats for documenting meetings, design decisions, and other records. Each team’s meeting lasts approximately forty minutes.

2.2 Applying the Immersion Model

The 1995 project involved the `jgraph` package [?] which according to its `man` page

“... takes the description of a graph or graphs in the standard input, and produces a postscript file on the standard output. `Jgraph` is ideal for plotting any mixture of scatter point graphs, line graphs, and/or bar graphs, and embedding the output into `LATEX`, or any other text processing system which can read postscript.”

Figure 1 provides an example of `jgraph` instructions and the resultant graph.

Task 1: Technical documentation

The first project task required the students to produce technical documentation for `jgraph`. To provide context for their work, the students were informed that they would be extending the

```

newgraph
title : Sample Graph Title
xaxis min 0 max 10
label : The X Axis Label
yaxis label : The Y Axis Label
newcurve
marktype circle
fill 0
linetype solid
pts 0 0 2 4 3 9 4 16
label : Line 1
newcurve
marktype xbar
fill 0
linetype none
pts 1 5 9 2 5 5
label : Line 2
legend on

```

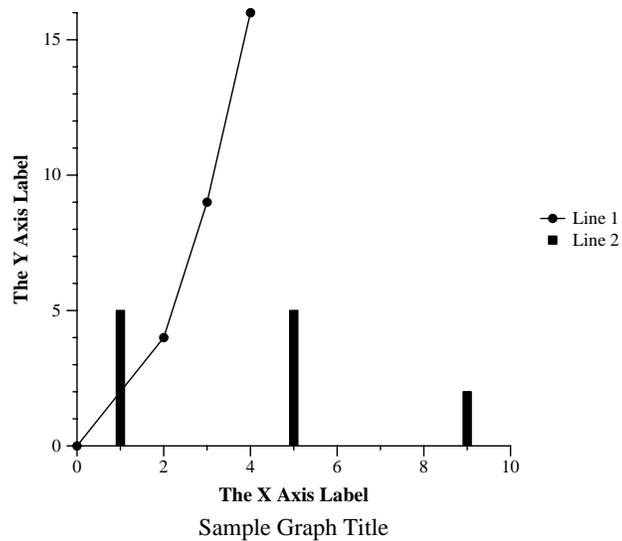


Figure 1a: `jgraph` instructions.

Figure 1b: The resultant graph.

Figure 1: Preparing and viewing graphs with `jgraph`.

functionality of `jgraph`, and that they would ultimately design and implement a graphical interface to their extended system. The regular meetings with ‘management’ allow the course supervisors to ensure that the groups remain focused on appropriate tasks.

This task tests a variety of skills based on the ability to read, understand and abstract important elements from C code. The code is undocumented and uncommented, packaged into eleven `.c` files and three `.h` files. Ultimately, the test of the students’ documentation is its usefulness in subsequent tasks involving modification of the software. We avoid precise specification of document structure but state that the object is to add ‘value’ by using the system representation techniques covered in lectures (such as those of the standard structured techniques) to convey the recovered design. Students are advised that discussion of algorithms, data structures, use-cases etc. should be appropriately cross-referenced both within the documentation and to the code itself, and students are guided towards appropriate support tools.

Task 2: Design and implement `jshell`

Task two required students to develop an interactive shell, `jshell`, which would allow exploratory and incremental development of graphs through a command line interface. With-

out this extension `jgraph` requires an entire graph description (such as that shown in figure 1a) to be input without any interaction. Consequently, each modification to a standard `jgraph` graph requires a time consuming cycle of edit-compile-view.

The task requirements are deliberately imprecise, offering no instructions on how the modifications are to be made. The aim is to encourage students to detect, confront, and overcome issues requiring design and coding decisions. Students are encouraged to interview fellow students to determine the requirements of the software as perceived by potential users.

The teams rapidly diverged in the focus of their designs, and we encouraged the diversity provided that the proposed solutions were documented with appropriate design rationale, and that they were achievable in the available time. The regular meetings provided an opportunity to moderate progress and design directions.

Some of the major categories of design issues addressed by different groups included the following:

Architecture Some groups opted to modify the `jgraph` code directly. Others constructed a shell by implementing a front-end which communicated with the original `jgraph` via pipes.

Compatibility Some groups felt it important

to ensure that their shell could process `jgraph` scripts directly. Others sacrificed backwards compatibility for increased functionality.

Error handling Those who assembled and passed entire `jgraph` scripts to `jshell` faced a variety of problems detecting and reporting errors in the script, broken pipes and so on. Those who processed individual commands in the shell command loop also faced challenging problems.

Task 3: Design a GUI for `jshell`

Task 3 required the design of a non-functional prototype user interface.

Before considering any graphical interface elements, students were required to identify a system context, stating who the users of their system would be, and identifying typical usage scenarios. Students are again encouraged to use their peers as participants in the design process, with the fellow students fulfilling the role of potential customer. Depending on their intended user base, the emphasis on various usability properties (such as those captured by the principles in [?]) varied substantially across the project teams.

Students were also required to produce a rough paper and pencil sketch (or “storyboard”) of their design, including cut-outs for system components such as pull-down menus or transient dialogue-boxes [?]. The emphasis was on rapid modifications to the interface. “Smart” teams were admonished if they produced screen-dumps of executable code. At the project meetings the storyboards were used to identify potential usability problems, and to discuss design alternatives.

Task 4: Implement the GUI and Full System

Students were then required to implement the system designed in the previous task. The GUI was implemented using the Tool Command Language (Tcl) and the Tk widget set [?] and was used to drive the character based `jshell`. A sample session with one of the best completed applications is shown in figure ??.

Tcl is an interpreted scripting language which is powerful and easy to learn. It is also possible to embed Tcl interpreters in C or C++ programs.

Tcl/Tk is an extremely effective addition to our software engineering project. Previously the size and complexity of interface toolkits (such as Xt and Motif, SUIT, InterViews, and so on) have almost prohibited the inclusion of GUI development within the time constraints of the project. In past projects we have experimented with the SUIT graphical toolkit and with the character-based terminal-independent package `curses`. Both experiences were disappointing: the students struggled to overcome the complexity of the SUIT toolkit, and the crude interfaces produced by `curses` failed to motivate the students. In contrast, Tcl/Tk abstracts most of the complexity of GUI development, allowing students to quickly build high-quality interfaces. The polished look and feel of their systems is also a strong motivator for the students.

3 Learning Objectives and Rationale

This section describes some of our learning objectives across four, somewhat overlapping, arenas of system development: requirements and design, software issues, user-interface design, team-management, and information presentation. Rather than present a complete list of our educational goals, only those pertinent to the immersion project approach are discussed.

In general, students benefit in that they have a chance to receive feedback early enough to avoid wasting time on ‘red herrings’ and to learn from small mistakes rather than suffer the consequences of large ones. The frequent meetings have led to a closer relationship with staff, encouraging students to view meetings as an opportunity to discuss ideas rather than an oral examination. Administering the meetings is demanding on staff time, but these costs are offset in two ways. First, there is no formal marking of submissions other than the final submission at the end of the year. Second, as the student teams have an allocated appointment time with the managers, they tend to ‘drop-in’ with problems less frequently than they have with previous models of project coordination.

3.1 Requirements and Design

It is important that the functional domain of the software project motivates the students. We

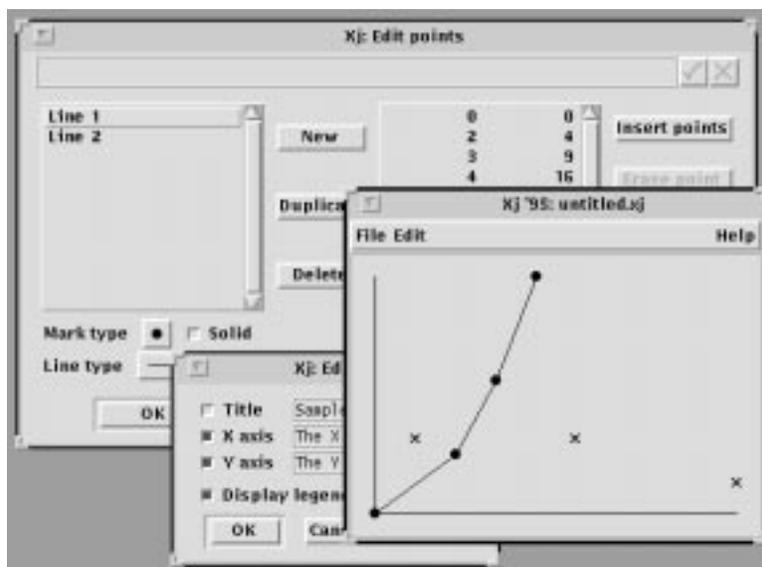


Figure 2: One team’s final system.

carefully select the initial project software to ensure that students are familiar with, and can gain from, the functionality provided.

A familiar functional domain has an additional important advantage: peer students are available as a potential target base of users. The project groups are encouraged to use their peers (those outside the course) as subjects for requirements capture and for interviews in task-centred system design [?]. Management is represented by the academic staff, and the customers are represented by peer students.

3.2 Software Issues

A primary objective of the project is to disabuse students of the impression, reinforced by several years of throw-away programming assignments, that software is a disposable item. Our decision to base the entire project on a piece of existing software (such as `jgraph`) is motivated by several important educational objectives.

- Examining and modifying code written by others is a common task in the workplace—particularly for entry level employees.
- The difficulty of comprehending code written by others is a powerful way to reinforce the importance of code quality and documentation.

- We believe that studying existing code nurtures empathies for those who will modify the student’s own code. Students are advised that their code may be evaluated by peer teams and that it may form part of the project exercise in subsequent years.
- Modifying existing code fosters an awareness of code evolution.

Additionally, experience with graphical user interface design is a common demand in the workplace. By including a GUI development component in the project, students gain experience in programming in an event-driven style.

3.3 User Interface Design

Our Software Engineering course includes a major lecture component on Human-Computer Interaction (HCI). Like many theoretical Software Engineering topics, theoretical HCI is often viewed as “obvious” by students until they experience it for themselves. We contend that the immersion approach is particularly appropriate for a project with a GUI development component. Two of our arguments are given below.

First, iterative design is a cornerstone of good user interface development [?, ?]. Continuous project meetings allow several design iterations with techniques such as storyboards

terbury prior to our experiment with immersion. All three approaches make the assumption that re-use is an important component. We have not considered models where the products are predominantly built from scratch.

4.1 Big bang

In the Big-bang approach tasks are introduced at the beginning of the course. Students work in groups which are entirely responsible for their own management. The project deliverables are submitted for assessment at the end of the course.

There are many problems associated with this approach, but one major difficulty is the failure of some groups to begin work early enough to achieve satisfactory results. To some extent this makes the project self-assessing as those who lack managerial skills are penalised (often severely). Although this may appear convenient, our educational objectives do not include punishing those students who do not currently possess particular skills and rewarding those who do. Rather, we should provide all students with opportunities to learn, improve and demonstrate these skills.

4.2 Milestones

To ease the problems of the big bang approach we introduced several milestones within the project. The idea is to ‘buy’ time-slices from students who work in a climate of inexorable internal assessment. Generally, milestone points correspond to the availability of one or more deliverables for assessment. Individual tasks may also be timed so that they overlap, allowing for the possibility of introducing changes in requirements during the course of the project.

While we have found that this technique ensures that some progress is made earlier in the year, an equally undesirable side-effect is introduced. Students perceive the project as a series of small assignments rather than as a large piece of work—leading once again to last-minute poor quality work. Consequently, the milestones have a tendency to become ‘inch pebbles’ to the students while the assessment load generated makes them appear millstones round the necks of staff! The considerable effort invested in marking is largely wasted as students have

moved on to other tasks by the time marking is completed and little opportunity is available for them to learn from their mistakes.

5 Conclusions

The sample project described in section ?? emphasises our message that software is constantly evolving. Tasks involving design recovery, documentation for change, and adding a GUI to an existing application are natural companions to the more traditional design, coding, and testing activities.

It is important to choose a topic that can capture student interest, and much suitable software such as `jgraph` is available via the Internet. The Tcl/Tk language has many features which make it ideal for use in projects. It is easy to learn, powerful, very good for controlling other programs, and—most important of all—fun! This makes it feasible to attempt to develop X11 GUI software within the tight time-frame typical of software engineering courses.

We have been encouraged by our results. The quality of the end products—the systems and documentation that the students produce—has increased. Our claims of success are supported by results of an evaluation exercise conducted in 1995 by the University of Canterbury’s Educational Research and Advisory Unit (ERAU) in addition to the normal course surveys. Although the project management demands on the staff remain about the same, we feel that our time is much better spent. Additionally, the incidence of intra-group problems has fallen, primarily because problems were detected earlier.

We are continuing to use and refine the immersion approach, and we encourage comments from others involved in project-oriented courses. The appendix below directs interested readers to an archive of information on our 1995 project.

Appendix

The full set of task requirements for the 1995 `jgraph` project and tar files containing some of the student submissions are also available from the same address can be accessed from <http://www.cosc.canterbury.ac.nz/~neville/project314.html>